

INSTALLATION INSTRUCTIONS BLACK ATLAS ROLL BAR FOR 2005-2020 TOYOTA TACOMA

PART # ATRB6BK

Before Installation

- Please read the instruction completely for easy installation, which will also help you to avoid scratches or other potential damages to your appealing car.
- The figures here are for reference only and may have differences with the actual product you received, however they share the same assembly way.

Care and Cleaning

- Mild soap may be used also to clean the Product.
- Please periodically check and retighten all the hardware and clean the investment for a refresh look.

arts li			1	1	
NO.	QTY	NAME	NO.	QTY	NAME
1	1	Luggage frame (with LED light)	2	1	Main tube 1
3	1	Side tube-L	4	1	Side tube-R
5	1	Decoration plate-L	6	1	Decoration plate-R
7	2	Red decoration plate	8	2	Connect bracket 1


Page 2 of 6

9	2	° ° °	10	2	
		Decoration plate backboard			Rubber plug
1	1	Connect bracket 2-L	12	1	Connect bracket 2-R
13	1		14	2	
		Connecting plate			Block
(15)	1	BLACKHORBER 0 0 0 0	16	1	BLACKNORSZ
		L-bracket			R-bracket
17	4		(18)	8	Flat washer D6
		Gum cover			
19	8	Button bood allon balto MC 20	20	8	
		Button head allen bolts M6_20			Hex nut M6
21	2		22	8	\bigcirc
		Button head allen bolts M8*30			Flat washer D8
23	14	CED MMMM	24	6	(O))
		Hex bolt M8*25			Hex nut M8
25	2	\bigcirc	26	8	\bigcirc
		Spring washer D8			Flat washer D10

			1	n	
27	6	T-Hex nut M10_35	28	6	Hex nut M10
29	8	Spring washer D10	30	2	Hex nut M10_25
31	2	Button head allen bolts M12_40	32	4	Flat head allen bolts M12_40
33	2	Flat washer D12	34	1	Allen wrench S=8
35	1	Allen wrench S=4	36	1	Allen wrench S=5
37	6	PVC	38	5	Black adhesive tape

Installation Steps

Step1: Assemble tubes with standard parts. Lock all the standard parts after adjust the position.

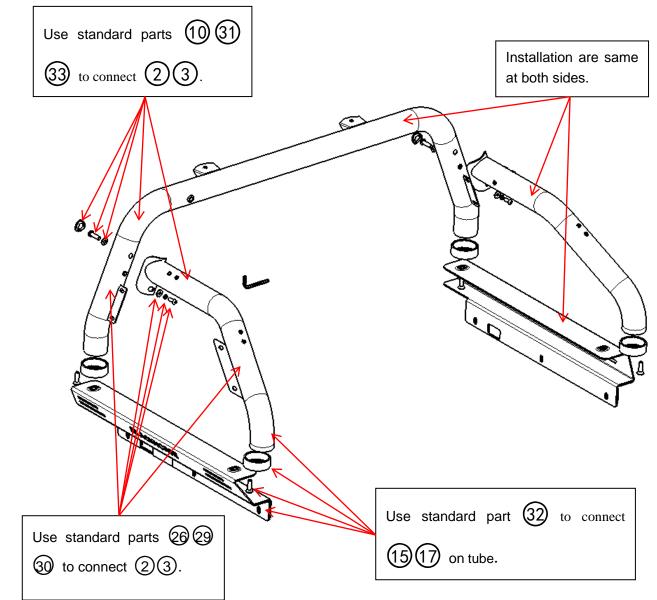

Step2: Assemble Luggage frame and tubes with standard parts. Lock all the standard parts after adjust the position.

Use standard parts 21222425 to	Use standard parts 22 23 24 to
connect $(13)(14)$ on the tubes. 2 places.	connect (1) on the tubes. 4 places.
to connect (b)(7)(9) on the	standard parts 23 to connect 8 1
tubes. 8 places.	
Step3: Put roll bar on the truck in an appropriate place. And use	\sim
places total. Remove the roll bar then drill the size of Φ 12 holes.	. Put the roll bar back and use standard (26)(27)
(28)(29) (37) to fasten.	
Notice: If compatible with tonneau cover, pls sticker the black adhesive picture shown.	3 holes in each part Black adhesive tape
NOTE	application goes beyond our quality
Any damages and losses caused by improper installation and warranty.	application, goes beyond our quality