

INSTALLATION INSTRUCTIONS

BEACON BULL BAR FOR NISSAN MURANO 15-20 PART # BE-A1602S

Before Installation

- Please read the instruction completely for easy installation, which will also help you to avoid scratches or other potential damages to your appealing car.
- The figures here are for reference only and may have differences with the actual product you
 received, however they share the same assembly way.

Care and Cleaning

- Mild soap may be used also to clean the Product.
- Please periodically check and retighten all the hardware and clean the investment for a refresh look.

Parts list

NO.	QTY	PIC	NO.	QTY	PIC
1	1	Bracket-L	2	1	Bracket-R
3	2	D14 Flat washer	4	2	M12*40 Hex bolt
5	12	D12 Flat washer	6	4	M12*35 Hex bolt
7	6	D12 Spring washer	8	6	M12 Hex nut

	1		BEAC	BEACON BULL BAR FOR NISSAN MURANO 15-20		
9	2	M8 T-bolt	19	2	D8 Spring washer	
11)	4	D8 Spring washer	12	2	M8 Hex nut	
13	2	M12 Plastic fixture block	14)	2	M8 Plastic fixture block	

Installation Steps

INSTALLING PICTURE

FIG.1



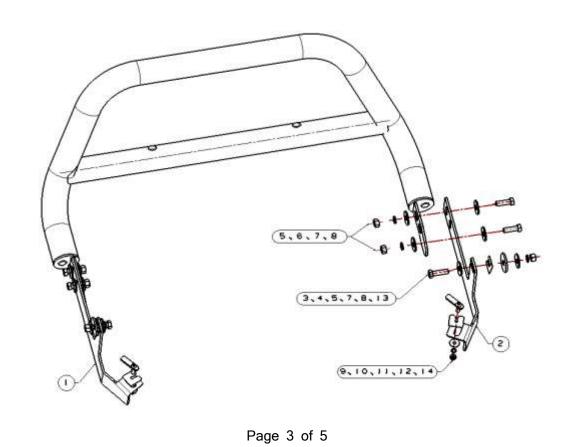


FIG.2

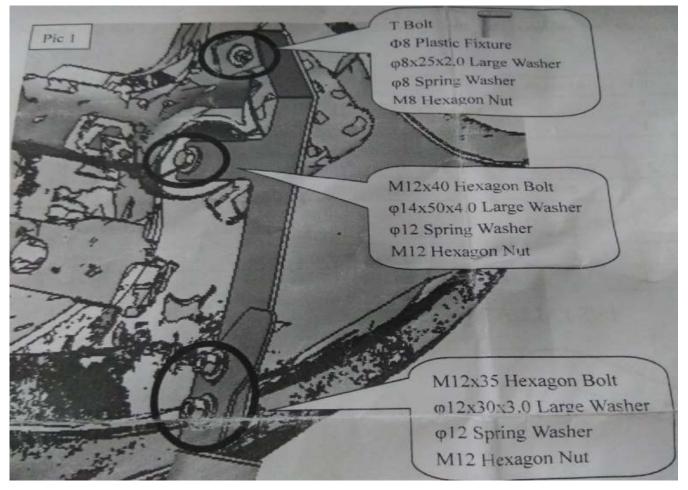

Step 1: Check all the contents are available in accordance with the above list.

Step 2: Find out the mounting position (FIG.2), using factory bolts to install bracket -L&R, then connect the bull bar and the brackets as FIG.1.

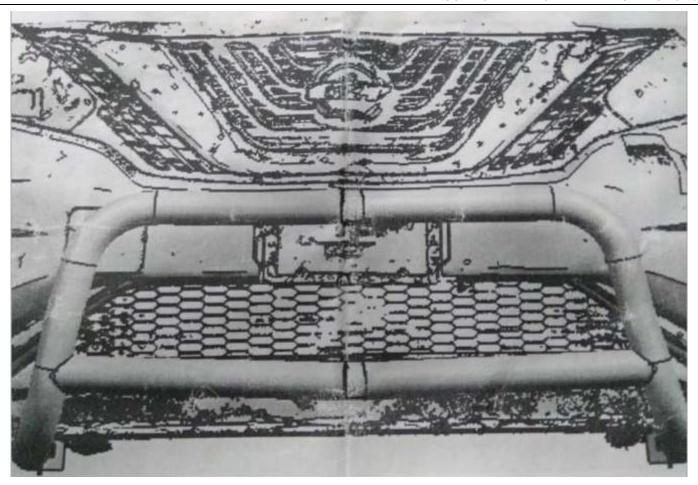

Step 3: Installation is finished, pick up all tools.

NOTE

Any damages and losses caused by improper installation and application, goes beyond our quality warranty.