



INSTALLATION INSTRUCTIONS
RUNNING BOARD BRACKETS FOR 2023 HONDA H-RV
PART # PR-H2069BK
















Before Installation

- Please read the instruction completely for easy installation, which will also help you to avoid scratches or other potential damages to your appealing car.
- The figures here are for reference only and may have differences with the actual product you received, however they share the same assembly way.

Care and Cleaning

- Mild soap may be used also to clean the Product.
- Please periodically check and retighten all the hardware and clean the investment for a refresh look.

Parts list

NO.	QTY	PIC	NO.	QTY	PIC
①	2	 Rear bracket (L/R)	②	2	 Middle bracket (L/R)
③	2	 Front bracket (L/R)	④	2	 Running board (L/R)
⑤	4	 Plastic retainers φ10	⑥	4	 Flat washer D10 (10x30x2.5mm)
⑦	4	 Lock washer D10	⑧	4	 Hex nut M10
⑨	4	 T Bolt M10*40	⑩	4	 Plastic retainers φ8
⑪	8	 Flat washer D8 (8x24x2mm)	⑫	8	 Lock washer D8
⑬	4	 Hex nut M8	⑭	4	 T Bolt M8*26
⑮	4	 Hex bolt M8*25			

Installation Steps

INSTALLING PICTURE:



(The left and right installation methods are the same. Below only shows the left side installation)


Step 1: Verify that all parts are present according to the parts list. Make a clear distinction of left and right side (driving position).

Step 2: Remove the rubber plugs from the mounting holes and keep the rubber plugs.

Step 3: Remove the screws or buckles from the mounting brackets of the chassis with tools, and keep the screws.

Step 4: Install the brackets as below figure shown.

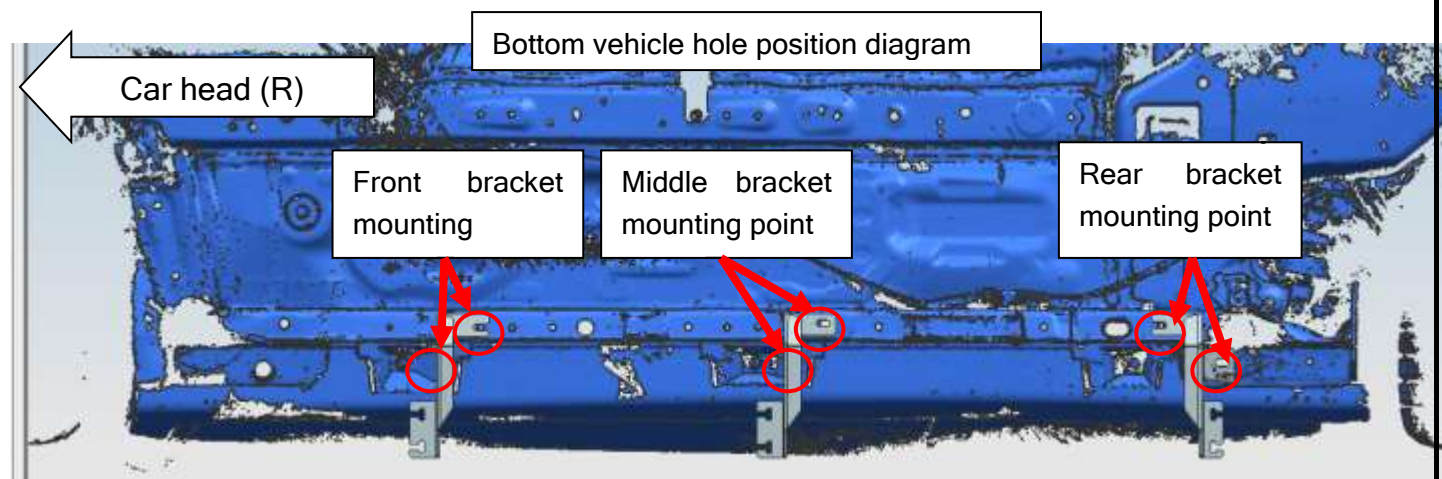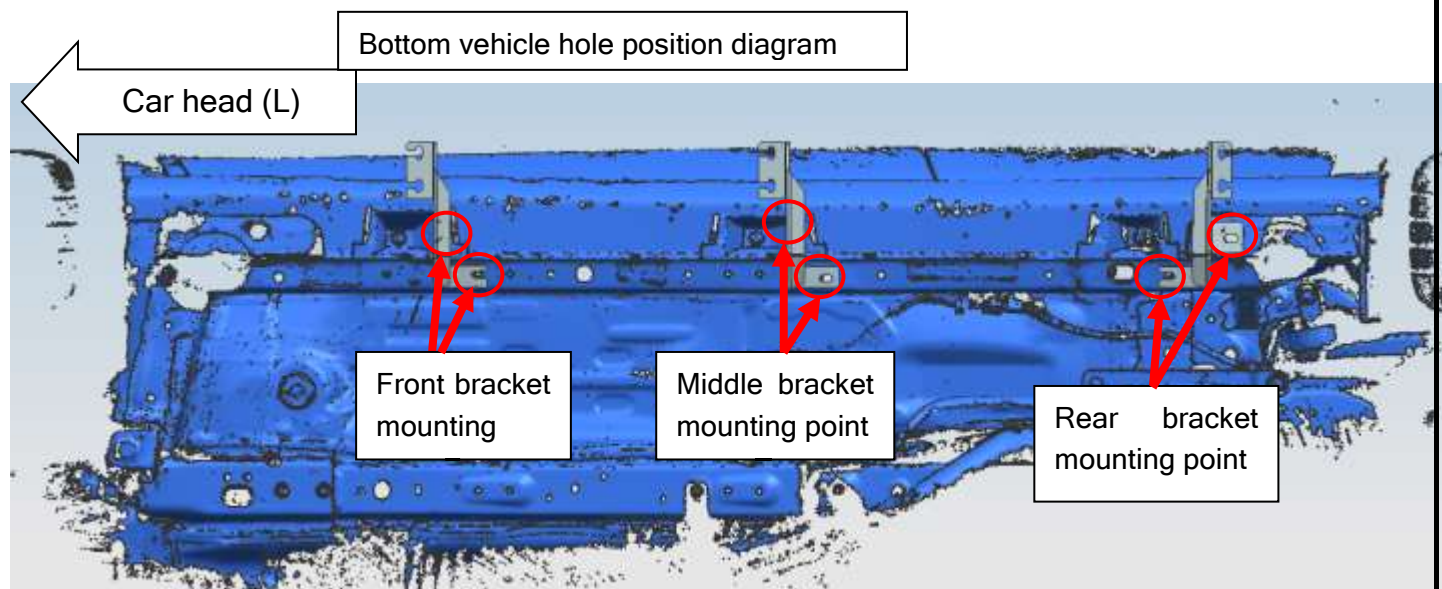

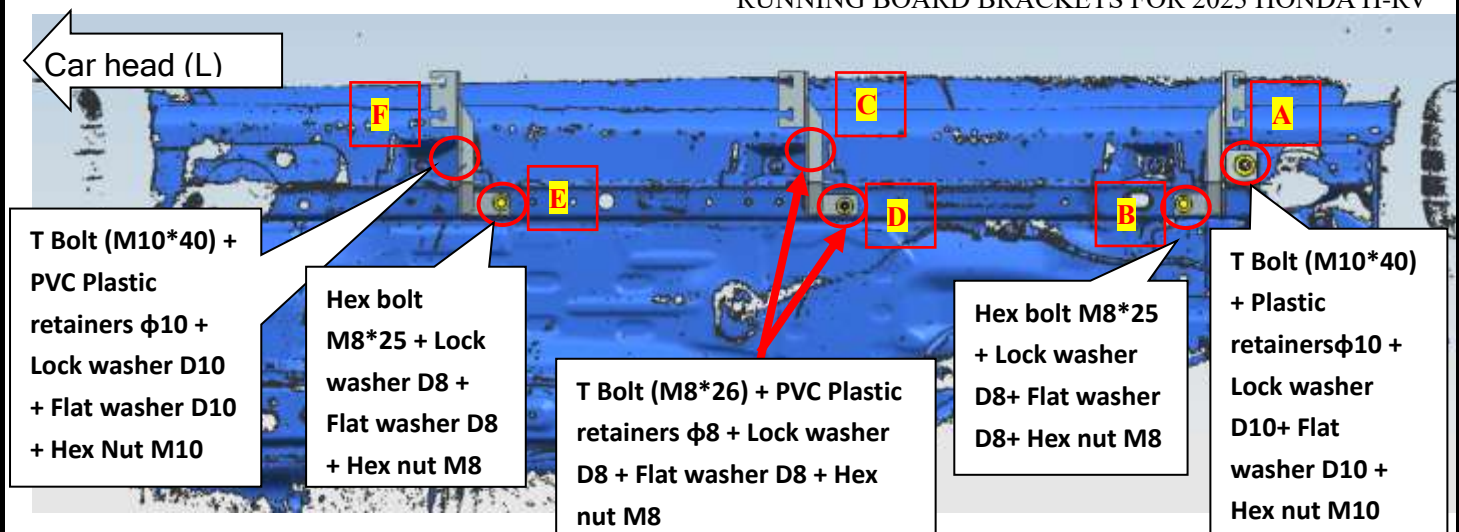


- ① Remove the C and F rubber plugs from side skirt for open the side skirt. And then remove the A, C, D and F rubber plugs.
- ② Install rear bracket (L): Find out the mounting holes A and B, and then place the bolts in the corresponding holes and fastening all the bolts. (as shown in the diagram above)
- ③ Install middle bracket (L): Find out the mounting holes C and D, and then place the bolts in the corresponding holes and fastening all the bolts. (as shown in the diagram above)
- ④ Install front bracket (L): Find out the mounting holes E and F, and then place the bolts in the corresponding holes and fastening all the bolts. (as shown in the diagram above)

PS: The installation holes are under the side skirt, only need to open the side skirt, and no need to remove the side skirt.

Step 5: Install running boards. Make a clear distinction of left and right side (driving position). Adjust the running board to a suitable position to install with the bracket. Fasten all the standard parts.


Use the corresponding standard parts of the original running board to lock.

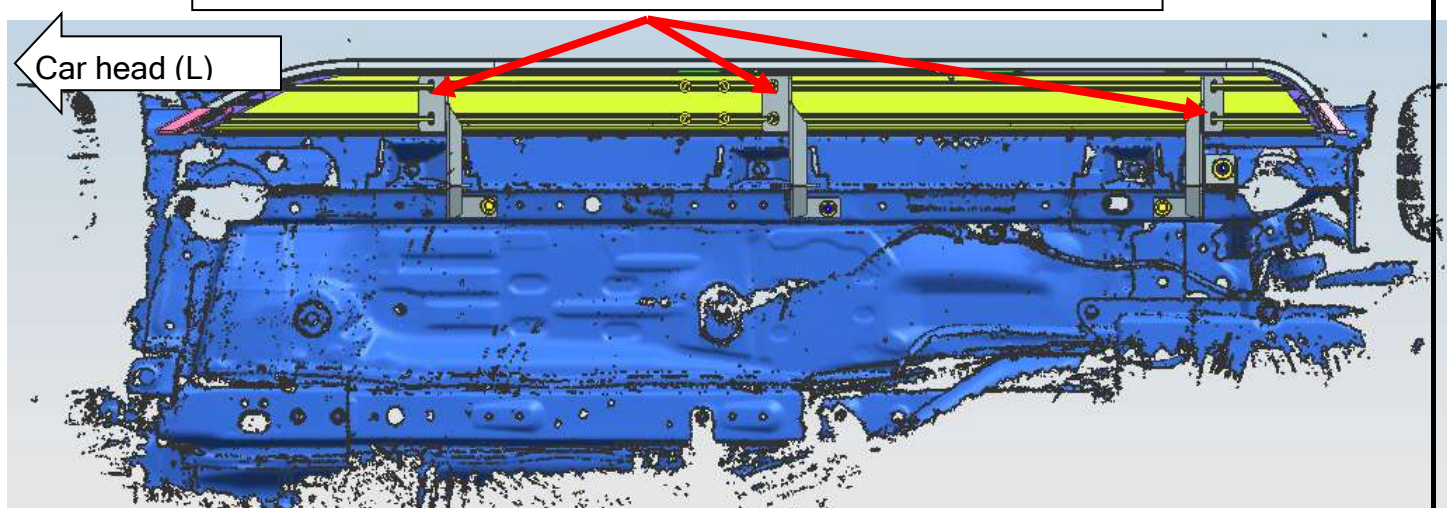

RUNNING BOARD BRACKETS FOR 2023 HONDA H-RV

Step 6: Repeat above 1 to 5 steps to install the right side, and the left and right are consistent, and then fasten all the bolts.

Step 7: Cut the skit plate: Only need to cut the place of below circles. Test and make sure that the grille guard is steadily fixed, fully tighten all hardware. Installation is finished, pick up all tools.

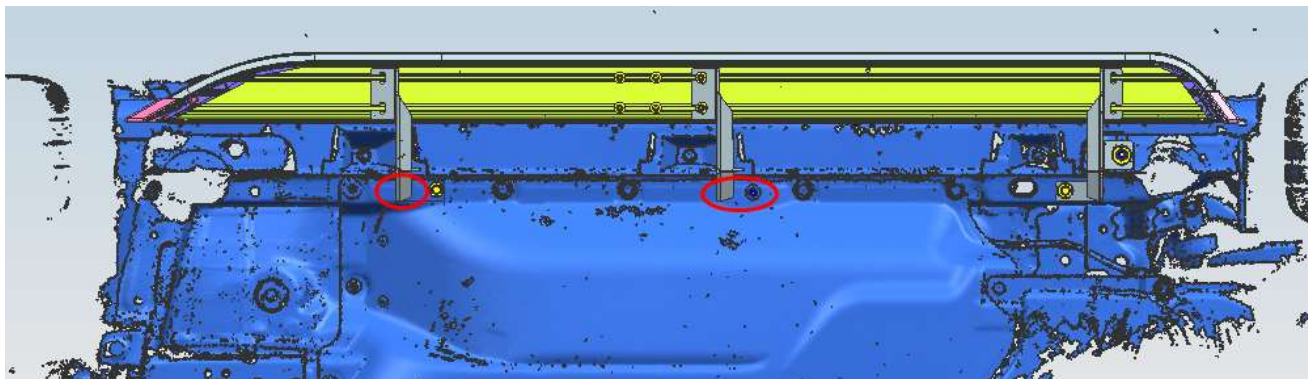

NOTE

Any damages and losses caused by improper installation and application, goes beyond our quality warranty.