
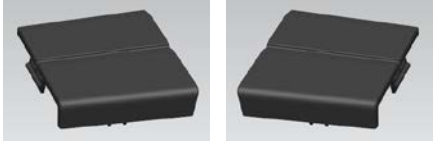



## Attention

1. Please read this installation menu before installing this part. Protect your car properly in case there is any scratch might happen.
2. You may need to periodically to re-tighten all hardware for safety use after installation.
3. Installation pictures are only for your reference, there might be some differences between pictures and real parts but no affection for your fitting.

### PART LIST

ITEM	QTY	PICTURE	ITEM	QTY	PICTURE
①	2	 <p>RUNNING BOARDS</p>	②	2	 <p>COVER PLATE</p>
③	16	 <p>Ducklow with padded nut</p>			

## 二、安装步骤

Step 1: Check the parts list whether the parts are complete

Step 2: Remove the side skirts and inner lining of the original car

Step 3: The screw holes of the pedal inner lining correspond to the body screws one by one (the bottom guard plate of the original car should be outside the inner lining), and the side ① bottom surface ② is tightened with M6 nut with pad. (As shown below)



①



②

Step 4: Put the shell on the corresponding inner lining buckle position, as shown in the figure ③④ to make it fit; and push it to make it fully conform to the body, and then install the front and back expansion buckles.



③



④

Step 5: Install the cover on the notch on the front door and rear door shell, check whether the pedal and the body fit in place, and install the other side in the same way.



Step 6: Check whether all the screws are fully locked, pack the tools, and the whole installation is over, as shown in the figure below.



Disclaimer: Caused due to improper installation initiates some related problem and losses, are beyond our company's quality assurance.