




**TEL: 1-866-XANATOS**

**INSTALLATION INSTRUCTIONS**  
**TAILLIGHT GUARD FOR NISSAN FRONTIER 05-11**  
**PART # 7NIFRSS / 7NIFRA**

**PARTS LIST:**

1	Driver/Left Taillight Guard	2	6-1.00mm x 18mm Phillips Screws
1	Passenger/Right Taillight Guard	2	6mm Flat Washers
2	Support Brackets	2	6mm Nylock Nuts
		2	4-0.70mm x 12mm Philips Screws
		2	4mm Flat Washers

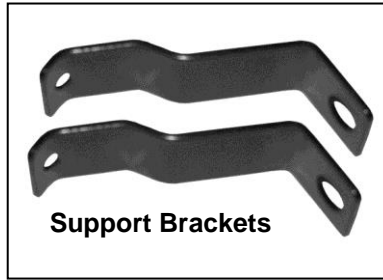

**PROCEDURE:**

1. **REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.**
2. **IMPORTANT!** Cover the finish edge around the taillight housing with masking tape to protect the finish of the vehicle when removing the taillight housing and installing the Taillight Guard.
3. Open the tailgate and remove the driver's side Phillips screws holding the taillight (**Figure 1**).
4. Grasp the taillight housing with one hand and pull with your other hand gently. **NOTE:** Be sure to pull straight out towards the rear of the vehicle to avoid possible damage. This is the same procedure required to change a burnt out taillight bulb in the assembly. For more info see owner's manual on replacing burn taillight bulbs.
5. Once you have removed the taillight, carefully disconnect the wire harness and set taillight aside.
6. Attach one of the Support Brackets to factory hole located in the edge of the taillight cavity; this hole is right by the taillight locator stud mounting location. Use the included (1) 6mm x 18mm Phillips Crew, (1) 6mm Flat Washer, and (1) 6mm Nylock Nut to attach Support Bracket to factory hole (**Figure 2**). Tighten hardware at this time. **NOTE:** Flat Washers mounts behind factory hole with the Nylock Nut.
7. Re-connect wire harness and attach taillight back to the vehicle (**Figure 3**).
8. Secure Taillight Guard to vehicle using the factory screws (**Figure 4**). Do not tighten at this time. **NOTE:** If Mounting Brackets don't fit properly, they can be adjusted to fit properly using a crescent wrench or a pair of pliers. Before adjusting make sure to protect the Mounting Brackets with masking tape to protect the finish.
9. Attach Taillight Guard to Support Bracket using the included (1) 4mm x 15mm Phillips Screw and (1) 4mm Flat Washer (**Figure 5**).
10. Align Taillight Guard properly, and then tighten all hardware at this time.
11. **IMPORTANT!** Carefully close the tailgate to make sure the Taillight Guard does not interfere with tailgate. If so, remove Taillight Guard and adjust the Mounting Brackets to fit properly.
12. Repeat steps 2-14 for passenger side Taillight Guard.
13. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

**To protect your investment,** wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

**For stainless steel:** Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Taillight Guard.

**For gloss black finishes:** Mild soap may be used to clean the Taillight Guard.

**(Driver Side Installation Shown)**

TAIL LIGHT GUARD FOR NISSAN FRONTIER 05-11

