



**INSTALLATION INSTRUCTIONS**  
**BLACK TAIL LIGHT GUARD FOR TOYOTA 4 RUNNER 96-02**  
**PART # 7TN15A**

**PARTS LIST:**

1	Driver/Left Taillight Guard
1	Passenger/Right Taillight Guard
4	6-1.00mm x 25mm Phillips Screws
4	6mm x 12mm OD x 1.5mm Flat Washer

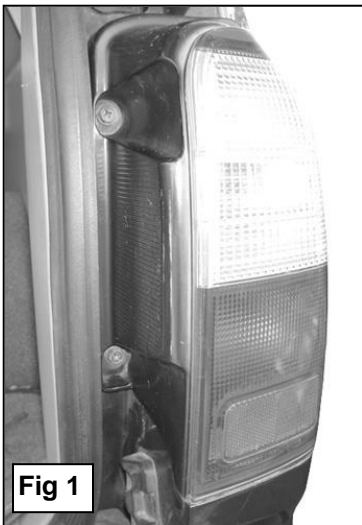
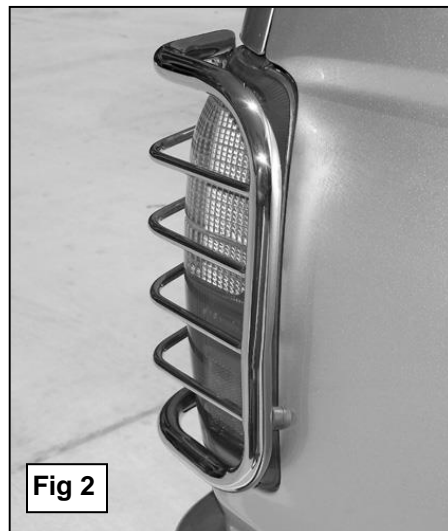
**PROCEDURE:**

- 1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.**
- Open the rear door and remove driver side factory screws holding the passenger side taillight assembly into the body panel, **(Figure 1)**. **NOTE:** Taillight assembly removal not required for installation.
- Carefully position the passenger side Taillight Guard over the taillight assembly and attach it using the included (2) 6mm x 25mm Phillips Screws and (2) 6mm Flat Washers, **(Figures 2 & 3)**. **NOTE:** The long Mounting Brackets on the Taillight Guard can be adjusted for alignment as required. Re-bend the brackets as necessary for proper fit and clearance as pictured above.
- Once the Taillight Guard is fully installed, slowly close the rear door and check for clearance. **IMPORTANT:** Do not close the rear door without checking for clearance first.
- Repeat **Steps 2 - 4** for driver side Taillight Guard installation.
- Do periodic inspections to the installation to make sure that all hardware is secure and tight.

**To protect your investment**, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

**For stainless steel:** Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Taillight Guard.

**For gloss black finishes:** Mild soap may be used to clean the Taillight Guard.

**Fig 1****Fig 2****Fig 3**