



**BLACK HORSE
OFF ROAD®**

TEL: 1-866-XANATOS

INSTALLATION INSTRUCTIONS

TAIL LIGHT GUARD FOR

09-18 DODGE RAM 1500 (Incl. 19-23 Ram 1500 Classic)

10-24 DODGE RAM 2500/3500

PART # 7DGRMSS/7DGRMA

PARTS LIST:

Qty	Description	Qty	Description
1	Driver/Left Taillight Guard	2	6mm Nylock Nuts
1	Passenger/Right Taillight Guard	2	4-.70mm x 15mm Phillips Screws
2	Support Brackets	2	4mm Internal Locking Star Washers
2	6mm x 20mm Button Head Screws	2	4mm x 8.9mm OD x .8mm Flat Washers
2	6mm x 30mm OD x 2mm Flat Washers		

PROCEDURE:

- 1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.**
- 2. IMPORTANT!** Cover the bed edge around the taillight housing with masking tape to protect the finish of the vehicle when removing the taillight housing and installing the Taillight Guard.
- 3.** Open the tailgate and remove the (2) screws holding the driver's side taillight, **(Figure 1)**.
- 4.** Grasp the taillight assembly with both hands and pull gently straight back, **(Figure 2)**. **NOTE:** Be sure to pull straight towards the rear of the vehicle to avoid possible damage. This is the same procedure required to change a taillight bulb in the assembly. For more info, see owner's manual on replacing taillight bulbs.
- 5.** With the taillight assembly removed, gently let it hang from the wiring. **NOTE:** You do not need to disconnect the wire harness but take precautions to prevent damage to the wiring and insulation.
- 6.** Select (1) Support Bracket and bolt it to the hole in the body using (1) 6mm x 20mm Button Head Screw, (1) 6mm Flat Washer and (1) 6mm Nylock Nut, **(Figure 3)**. **IMPORTANT:** Tighten the 6mm x 20mm Button Head Screw but do not over-tighten or the Support Bracket may be damaged.
- 7.** Line-up the taillight assembly with the plastic clips on the inner body panel and firmly push it back into position. Position the Taillight Guard over the taillight and attach it to vehicle using the (2) factory screws, **(Figure 4)**. Do not tighten at this time. **NOTE:** If the Mounting Tabs or Support Brackets don't fit properly, they can be adjusted to fit using a pair of pliers. Before adjusting, make sure to cover the Taillight Guard mounting brackets with masking tape to protect the finish.
- 8.** Attach Taillight Guard to the Support Bracket using the included (1) 4-.70mm x 15mm Phillips Screw, (1) 4mm Lock Washers, and (1) 4mm Flat Washers, **(Figure 5)**.
- 9.** Align the Taillight Guard and tighten all hardware. **IMPORTANT!** Carefully close the tailgate to make sure that the Taillight Guard does not interfere with the tailgate. If so, remove the Taillight Guard and adjust the Mounting Brackets to fit properly.
- 10.** Repeat steps 2-9 for the passenger side Taillight Guard installation.
- 11.** Do periodic inspections to the installation to make sure that all hardware is secure and tight.





To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

For stainless steel: Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Taillight Guard.

For gloss black finishes: Mild soap may be used to clean the Taillight Guard.

TAIL LIGHT GUARD FOR 09-18 DODGE RAM 1500 (Incl. 19-23 Ram 1500 Classic)
10-24 DODGE RAM 2500/3500

DRIVER SIDE INSTALLATION PICTURED

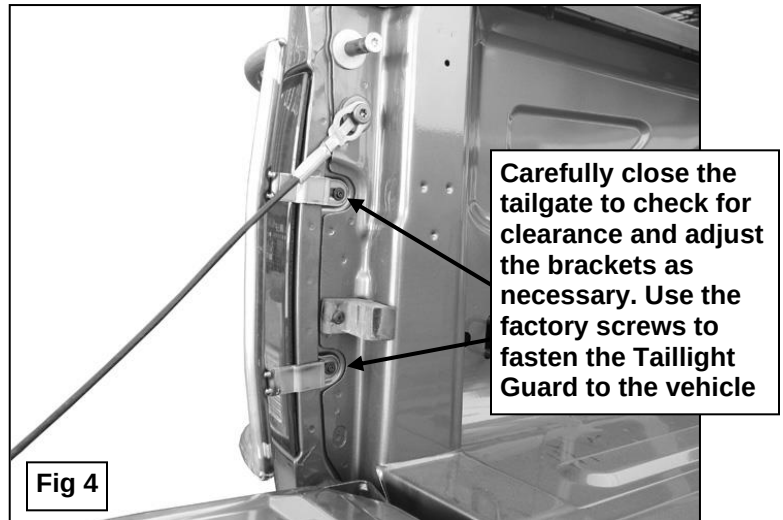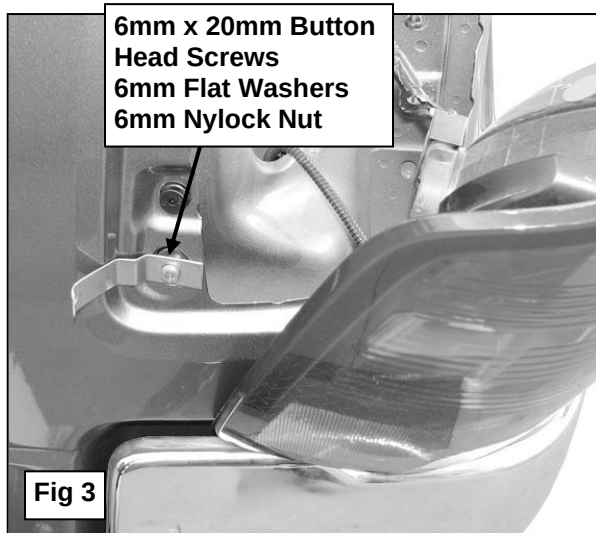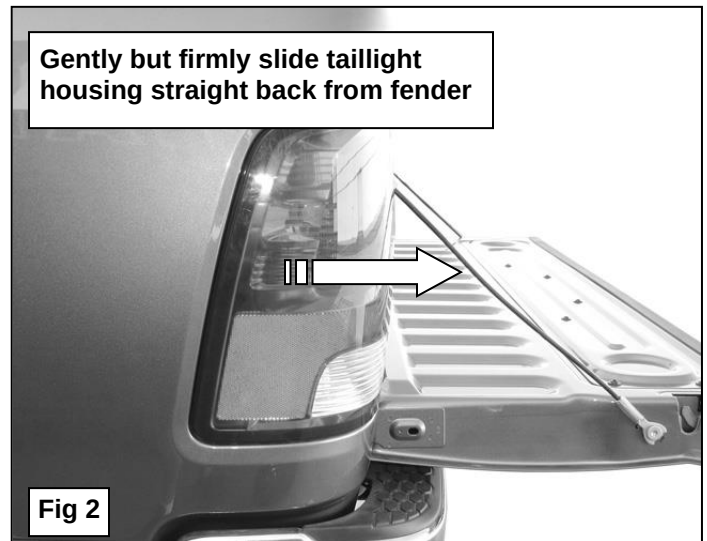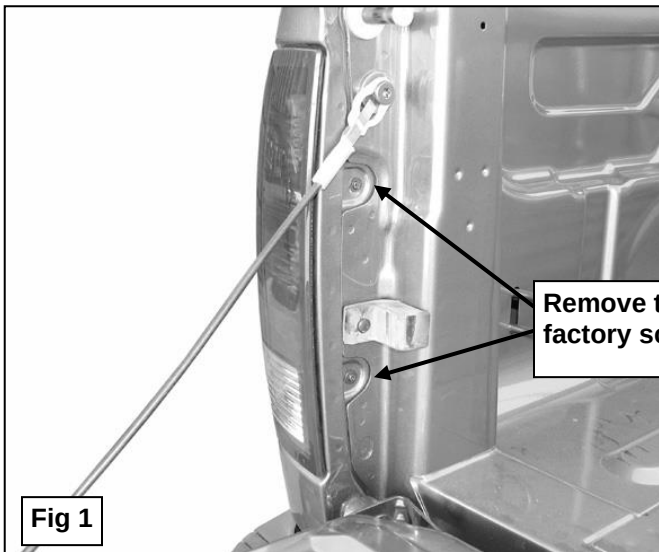

Secure the Taillight Guard to the Support Bracket with:
4mm x 15mm Phillips Screw
4mm Lock Washer
4mm Flat Washer

